




# 48"x110" 6MM

Product Catalog



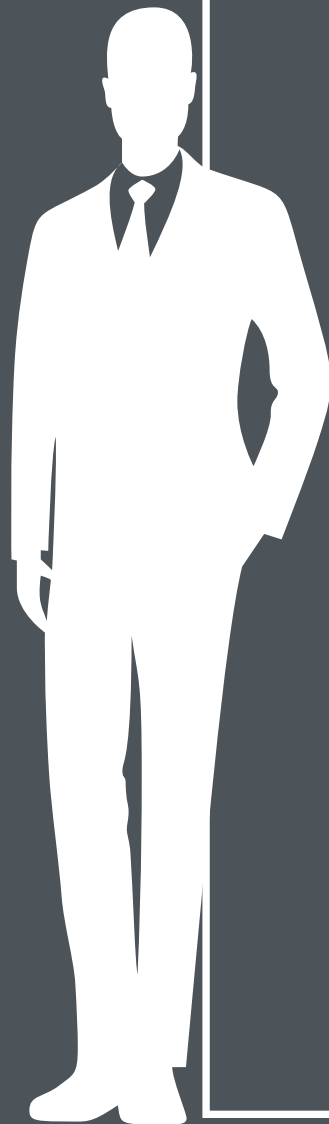

# MAX

---

EcoStone	2
Farmhouse Living	10
JEM	19
Technical Specifications	31
Green Certifications & Accreditations	32

---

EcoStone\_Fog\_Vein Cut\_48"x110" \_Matte

Note: Sizes listed are nominal. Colors shown may vary from actual product. Final selection should be made from actual product samples.



# EcoStone


---



**Carbon  
Neutral**



Cross Cut - 1104374

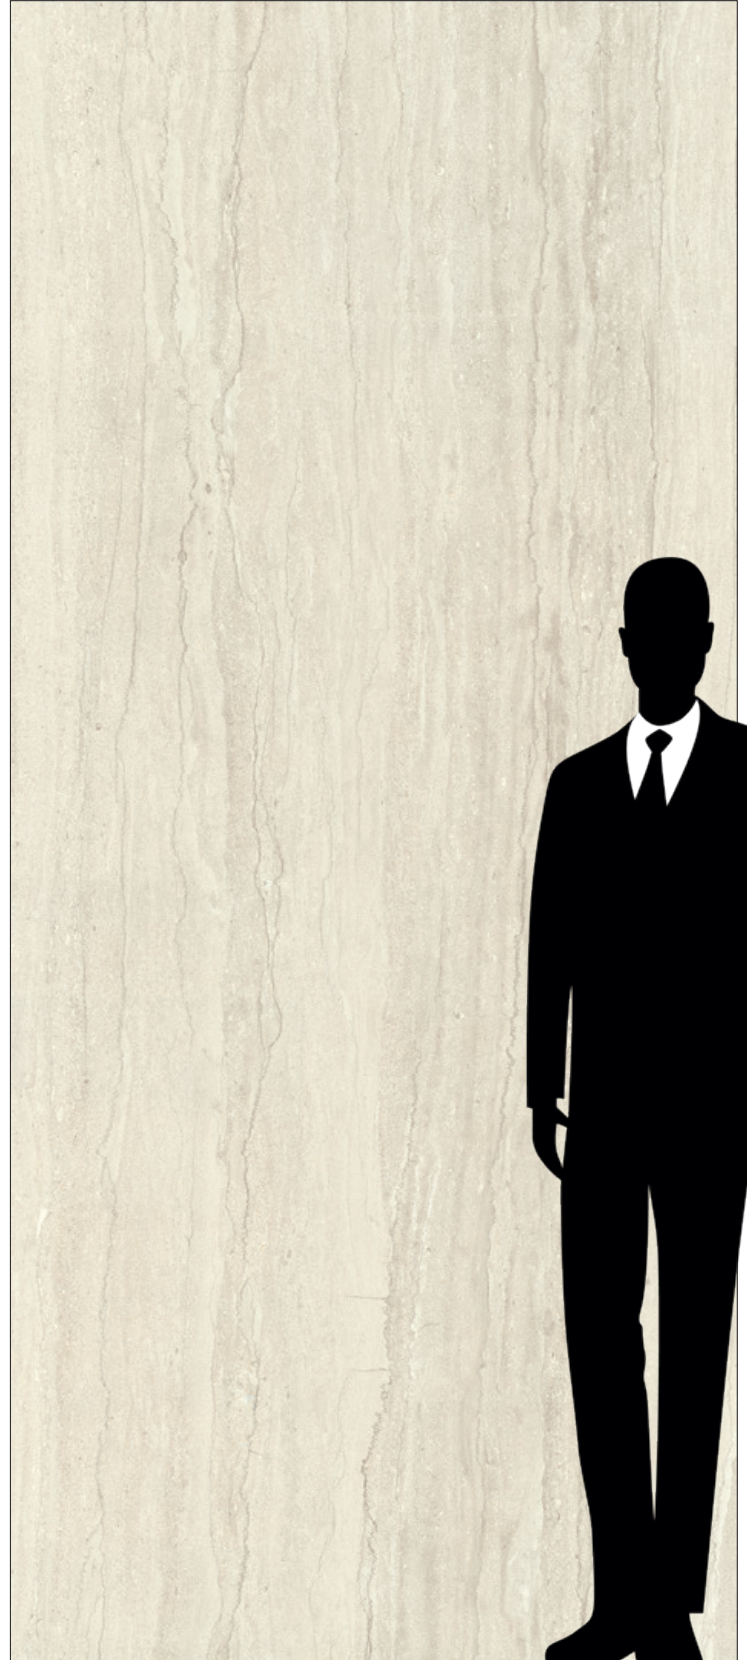

Vein Cut - 1104379

**FOG**

Matte / Rectified  
4 Total Faces Each



Cross Cut Chevron Deco - 1104384



Cross Cut Flute Deco - 1104386

**FOG**  
Decos

Matte / Rectified  
4 Total Faces Each



Cross Cut - 1104375



Vein Cut - 1104380

**JUTE**

Matte / Rectified  
4 Total Faces Each



Cross Cut - 1104376



Vein Cut - 1104381

**MIST**

Matte / Rectified  
4 Total Faces Each





Cross Cut Chevron Deco - 1104385



Cross Cut Flute Deco - 1104387

**MIST**  
Decos

Matte / Rectified  
4 Total Faces Each




Cross Cut - 1104377



Vein Cut - 1104382

**FOSSIL**

Matte / Rectified  
4 Total Faces Each

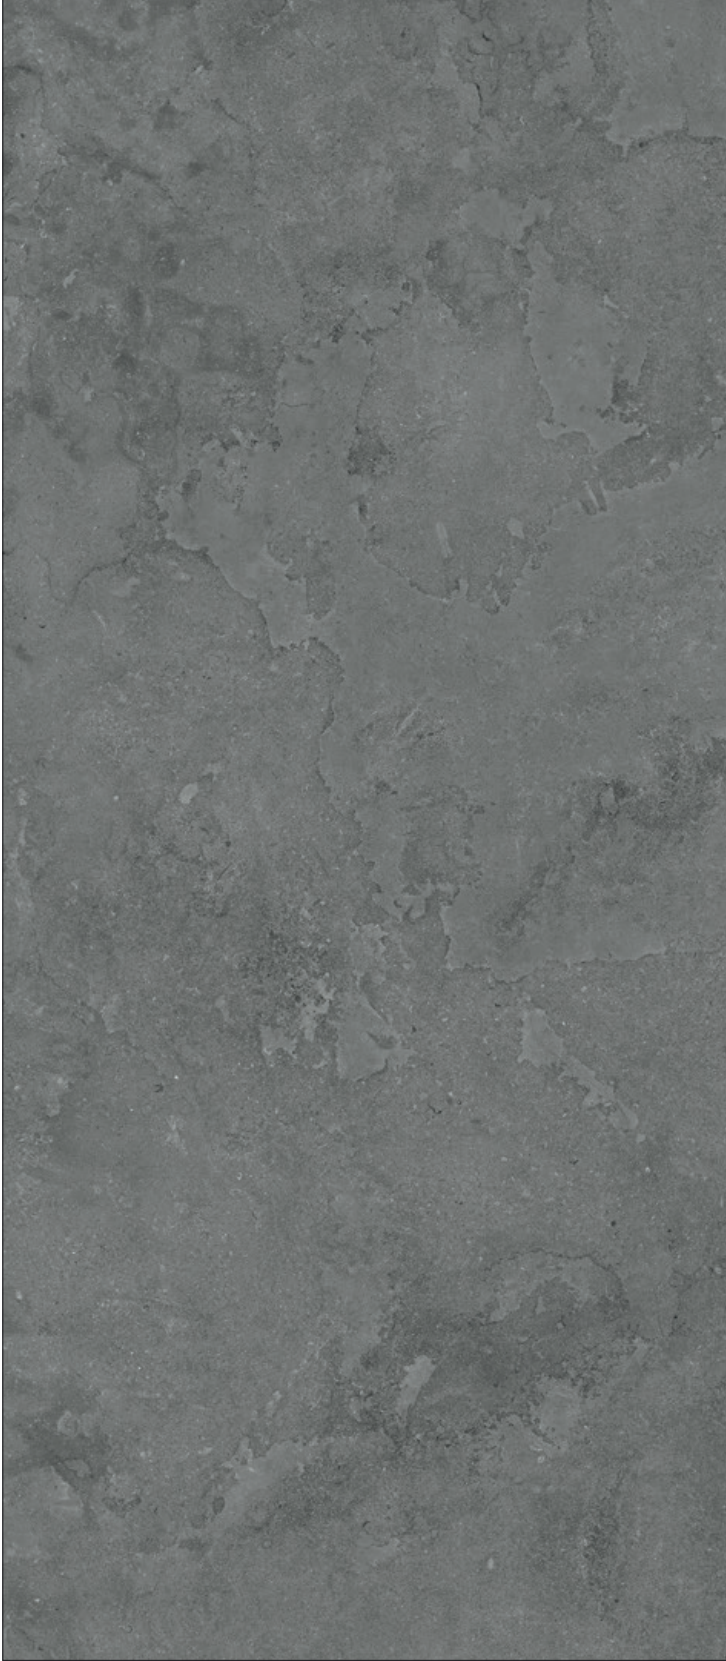

Cross Cut - 1104378



Vein Cut - 1104383

## PUMICE

Matte / Rectified  
4 Total Faces Each



# Farmhouse Living

# Farmhouse Living

## ALABASTER



1104261

Matte

Rectified

4 Total Faces



Carved Deco - 1104265



Waved Deco - 1104269

**ALABASTER**

Decos

Matte / Rectified  
4 Total Faces Each



# Farmhouse Living

## PEWTER

1104262

Matte

Rectified

4 Total Faces





Carved Deco - 1104266



Waved Deco - 1104270

**PEWTER**

Decos

Matte / Rectified  
4 Total Faces Each





# Farmhouse Living

## MILLSTONE

1104263

Matte

Rectified

4 Total Faces





Carved Deco - 1104267



Waved Deco - 1104271

**MILLSTONE**

Decos

Matte / Rectified  
4 Total Faces Each



# Farmhouse Living

## SLATE

1104264

Matte

Rectified

4 Total Faces



Carved Deco - 1104268



Waved Deco - 1104272

**SLATE**  
Decos

Matte / Rectified  
4 Total Faces Each



**JEM**

# JEM

## ADAGIO WHITE



1103374 Matte

1103380 Polished

Rectified

4 Total Faces



# JEM

## FORTE WHITE

1103377 Matte

1103383 Polished

Rectified

4 Total Faces





Bookmatch A - 1103391



Bookmatch B - 1103392

## **FORTE WHITE**

Bookmatch Faces

Polished / Rectified

1 Total Face Each





# JEM

## CAPRICCIO GREY



1103373 Matte

1103379 Polished

Rectified

4 Total Faces



Bookmatch A - 1103385



Bookmatch B - 1103386

## **CAPRICCIO GREY**

Bookmatch Faces

Polished / Rectified

1 Total Face Each



# JEM

## ARIA GOLD

1103375 Matte

1103381 Polished

Rectified

4 Total Faces





Bookmatch A - 1103393



Bookmatch B - 1103394

## **ARIA GOLD**

Bookmatch Faces

Polished / Rectified

1 Total Face Each

# JEM

## CRESCENDO BLUE

1103376 Matte

1103382 Polished


Rectified

4 Total Faces





Bookmatch A - 1103387

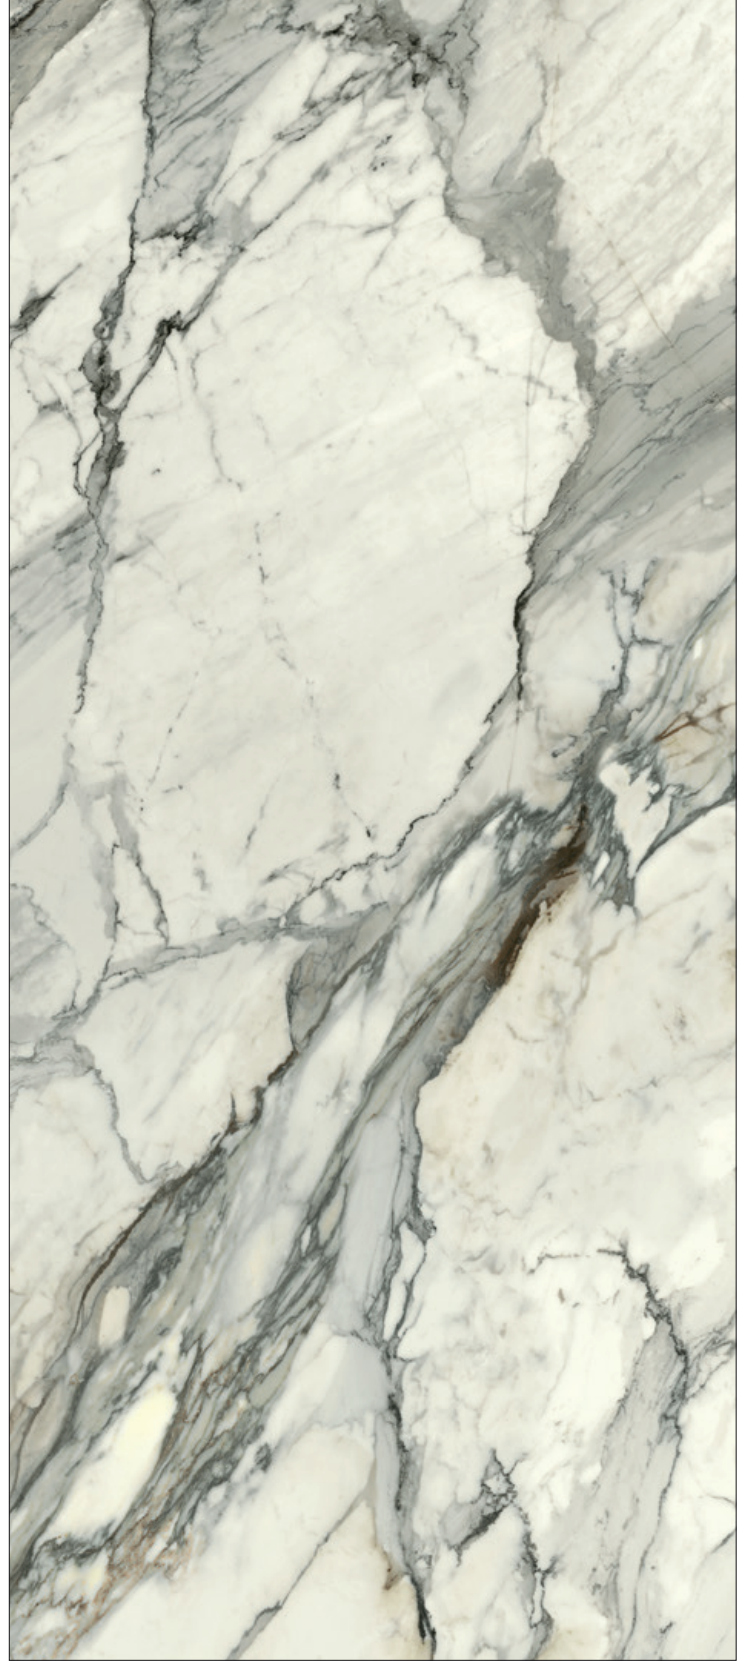

Bookmatch B - 1103388

## **CRESCENDO BLUE**

Bookmatch Faces

Polished / Rectified

1 Total Face Each

# JEM

## SYMPHONY RED

1103378 Matte

1103384 Polished

Rectified

4 Total Faces





Bookmatch A - 1103389



Bookmatch B - 1103390

## **SYMPHONY RED**

Bookmatch Faces

















Polished / Rectified

1 Total Face Each



# Technical Specifications

This product meets or exceeds all standards described in ANSI A137.1.

	SPECS	TEST METHOD	INDUSTRY STANDARD	MILE <sup>®</sup> stone VALUES	
	WATER ABSORPTION	ASTM C373	≤0.5%	≤0.4%	
		ASTM C373	0.5%	Meeting the water absorption criteria of the American national standard PTCA	
	SURFACE WEAR RESISTANCE	ANSI A137.1	Surface Wear-resistance properties of glazed vitreous and porcelain tiles.	ALL RESIDENTIAL / COMMERCIAL	
	CHEMICAL RESISTANCE	ASTM C650	A tile sample is placed in continuous contact with a variety of chemicals for 24 hours. No sample must show visible defects.	NOT AFFECTED	
	D.C.O.F. AcuTest <sup>®</sup>	ANSI A326.3	≥0.42 WET	≥0.42 WET	
				>0.55 WET 2CM	
	STAIN RESISTANCE	ASTM C1378	Surfaces are exposed to staining agents for 24 hours followed by four cleaning procedures. Results are recorded post cleaning.	NOT AFFECTED	
	BREAKING STRENGTH GAUGED PORCELAIN	ASTM C1505	≥175 lbf	≥200 lbf	
	BREAKING STRENGTH	ASTM C648	≥275 lbf	≥300 lbf	
	BREAKING STRENGTH OUTDOOR 2CM	ASTM 1505	2000 lbf (10.9 kN)	≥2500 lbf	
	RESISTANCE TO FREEZE	ASTM C1026	A tile sample is subjected to repeated processes of freezing and thawing. Sample must show no visible defects.	RESISTANT	
	WARPAGE EDGE	ASTM C485	±0.40% or ±0.05 in (±1.8 mm)	± 0.40%	Rectified
	WARPAGE DIAGONAL	ASTM C485	±0.40% or ±0.07 in (±1.8 mm)	± 0.40%	Rectified
	WEDGING	ASTM C502	±0.25% or ±0.03 in (±0.8 mm)	± 0.25%	Rectified
	WARPAGE EDGE	ASTM C485	±0.50% or ±0.07 in (±1.8 mm)	± 0.50%	Calibrated
	WARPAGE DIAGONAL	ASTM C485	±0.50% or ±0.07 in (±1.8 mm)	± 0.50%	Calibrated
	WEDGING	ASTM C502	±0.50% or ±0.08 in (±2.0 mm)	± 0.50%	Calibrated
	THICKNESS	ASTM C499	Range: ± 0.04 in	≤0.04 in	

• Due to the inherent nature of fired porcelain tile, it is important to note that the coefficient of friction may vary within and between product runs.

# Green Certifications & Accreditations

## DESCRIPTION

	<p>Declare labels disclose all intentionally added ingredients and residuals present in the final product. Being Red List Free means the worst materials, chemicals, and elements for human and environmental health are not present within our products.</p>
	<p>The Health Product Declaration Collaborative transparency declaration for all of Florim USA's naturally occurring materials.</p>
	<p>Certification of plant and product specific Environmental Product Declaration (EPD) which tracks environmental impacts from the production of porcelain tile.</p>
	<p>Tile Council of North America and the American National Standards Institute's standard for sustainability and environmental impact.</p>
	<p>Underwriter's Laboratories certification of low emitting materials. Florim USA is Green Guard Gold certified.</p>
	<p>Bureau Veritas Standards Program verifies and certifies both pre- and post-consumer recycled content.</p>
	<p>Defines post-consumer content of as much as 3% recycled material which reduces landfill impact.</p>
	<p>Defines pre-consumer content of as much as 45% recycled material which reduces our carbon footprint.</p>
	<p>Florim USA's sustainability and social practices support the mission of The International Living Future Institute which strives to create a socially just, culturally rich, and ecologically restorative community.</p>
	<p>USGBC is committed to suit a more sustainable life. Florim USA supports this mission by manufacturing products which aid architects in achieving USGBC certification.</p>
	<p>Florim USA sources &gt;95% raw material within a 500 mile radius, which results in a smaller carbon footprint.</p>
	<p>Florim USA actively participates in the Tile Council of North America which allows us to be on the forefront of advances in the tile industry and its standards.</p>
	<p>The Tennessee Recycling Coalition is dedicated to promoting recycling and sustainable material management practices, and awarded Florim USA the Tennessee Recycler of the Year award for 2020.</p>



MADE IN THE USA



300 International Blvd. Clarksville, TN 37040 | [www.milestonetiles.com](http://www.milestonetiles.com) | 1-877-356-7461



Sustainable Tile, Made in the USA